

Please type a plus sign (+) inside this box → ☐

PTO/SB/05 (4/98)
Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No. 367.39322X00

First Inventor or Application Identifier Renford HEAYSMAN

Title A RADIOTELEPHONE HANDSET

Express Mail Label No.

APPLICATION ELEMENTS
See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☒ * Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)

2. ☒ Specification [Total Pages 12]
(preferred arrangement set forth below)

- Descriptive title of the invention
- Cross References to Related Applications
- Statement Regarding Fed sponsored R & D
- Reference to Microfiche Appendix
- Background of the invention
- Brief Summary of the invention
- Brief Description of the Drawings (if filed)
- Detailed Description
- Claim(s)
- Abstract of the Disclosure

3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 5]

4. Oath or Declaration [Total Pages]

- a. ☐ Newly executed (original or copy)
- b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))
(for continuation/divisional with Box 16 completed)
- i. ☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting
inventor(s) named in the prior application,
see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

*** NOTE FOR ITEMS 1 & 3 IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY
FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT
IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).**

5. ☐ Microfiche Computer Program (Appendix)

6. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)

- a. ☐ Computer Readable Copy
- b. ☐ Paper Copy (identical to computer copy)
- c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

7. ☐ Assignment Papers (cover sheet & document(s))

8. ☐ 37 C.F.R. § 3.73(b) Statement ☐ Power of
(when there is an assignee) ☐ Attorney

9. ☐ English Translation Document (if applicable)

10. ☒ Information Disclosure ☐ Copies of IDS
Statement (IDS)/PTO-1449 Citations

11. ☐ Preliminary Amendment

12. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)

13. ☐ * Small Entity ☐ Statement filed in prior application
Statement(s) ☐ Status still proper and desired
(PTO/SB/09-12)

14. ☒ Certified Copy of Priority Document(s)
(if foreign priority is claimed)

15. ☐ Other: _____

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. _____

Prior application information: Examiner _____

Group / Art Unit: _____

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label

020457

or ☐ Correspondence address below

(Insert Customer No. or Attach bar code label here)

Name

Address

City

State

Zip Code

Country

Telephone

Fax

Name (Print/Type) Carl L. Brundidge

Registration No. (Attorney/Agent)

29,621

Signature

Date 11/24/2000

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

FEE TRANSMITTAL

for FY 2000

Patent fees are subject to annual revision.
Small Entity payments must be supported by a small entity statement,
otherwise large entity fees must be paid. See Forms PTO/SB/09-12.
See 37 C.F.R. §§ 1.27 and 1.28.

TOTAL AMOUNT OF PAYMENT (\$)**790.00**

Complete if Known

Application Number	
Filing Date	November 24, 2000
First Named Inventor	Renford HEAYSMAN
Examiner Name	
Group / Art Unit	
Attorney Docket No.	367.39322X00

METHOD OF PAYMENT (check one)

1. ☐ The Commissioner is hereby authorized to charge indicated fees and credit any overpayments to:

Deposit Account Number **01-2135**

Deposit Account Name **Antonelli, Terry, Stout & Kraus**

☒ Charge Any Additional Fee Required
Under 37 CFR §§ 1.16 and 1.17

2. ☒ Payment Enclosed:
☐ Check ☐ Money Order ☒ Other

FEE CALCULATION

1. BASIC FILING FEE

Large Entity		Small Entity		Fee Description	Fee Paid
Fee Code (\$)	Fee Code (\$)	Fee Code (\$)	Fee Code (\$)		
101	690	201	345	Utility filing fee	710.00
106	310	206	155	Design filing fee	
107	480	207	240	Plant filing fee	
108	690	208	345	Reissue filing fee	
114	150	214	75	Provisional filing fee	

SUBTOTAL (1) (\$)**710.00**

2. EXTRA CLAIM FEES

Total Claims	Extra Claims	Fee from below	Fee Paid
9	-20** = 0	18	0
Independent Claims	4 - 3** = 1	80	80
Multiple Dependent			0

**or number previously paid, if greater; For Reissues, see below

Large Entity Small Entity

Fee Code (\$)	Fee Code (\$)	Fee Code (\$)	Fee Code (\$)	Fee Description
Fee Code (\$)	Fee Code (\$)	Fee Code (\$)	Fee Code (\$)	
103	18	203	9	Claims in excess of 20
102	78	202	39	Independent claims in excess of 3
104	260	204	130	Multiple dependent claim, if not paid
109	78	209	39	** Reissue independent claims over original patent
110	18	210	9	** Reissue claims in excess of 20 and over original patent

SUBTOTAL (2) (\$)**80.00**

FEE CALCULATION (continued)


3. ADDITIONAL FEES

Large Entity		Small Entity		Fee Description	Fee Paid
Fee Code (\$)	Fee Code (\$)	Fee Code (\$)	Fee Code (\$)		
105	130	205	65	Surcharge - late filing fee or oath	0.00
127	50	227	25	Surcharge - late provisional filing fee or cover sheet.	0.00
139	130	139	130	Non-English specification	0.00
147	2,520	147	2,520	For filing a request for reexamination	0.00
112	920*	112	920*	Requesting publication of SIR prior to Examiner action	0.00
113	1,840*	113	1,840*	Requesting publication of SIR after Examiner action	0.00
115	110	215	55	Extension for reply within first month	0.00
116	380	216	190	Extension for reply within second month	0.00
117	870	217	435	Extension for reply within third month	0.00
118	1,360	218	680	Extension for reply within fourth month	0.00
128	1,850	228	925	Extension for reply within fifth month	0.00
119	300	219	150	Notice of Appeal	0.00
120	300	220	150	Filing a brief in support of an appeal	0.00
121	260	221	130	Request for oral hearing	0.00
138	1,510	138	1,510	Petition to institute a public use proceeding	0.00
140	110	240	55	Petition to revive - unavoidable	0.00
141	1,210	241	605	Petition to revive - unintentional	0.00
142	1,210	242	605	Utility issue fee (or reissue)	0.00
143	430	243	215	Design issue fee	0.00
144	580	244	290	Plant issue fee	0.00
122	130	122	130	Petitions to the Commissioner	0.00
123	50	123	50	Petitions related to provisional applications	0.00
126	240	126	240	Submission of Information Disclosure Stmt	0.00
581	40	581	40	Recording each patent assignment per property (times number of properties)	0.00
146	690	246	345	Filing a submission after final rejection (37 CFR § 1.129(a))	0.00
149	690	249	345	For each additional invention to be examined (37 CFR § 1.129(b))	0.00
Other fee (specify) _____					0.00
Other fee (specify) _____					0.00

* Reduced by Basic Filing Fee Paid

SUBTOTAL (3) (\$)**0.00**

SUBMITTED BY

Name (Print/Type)	Carl I. Brundidge	Registration No. (Attorney/Agent)	29,621	Telephone	703-312-6600
Signature		Date	11/24/2000		

WARNING:

Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants: R. HEAYSMAN
Serial No.: Not yet assigned
Filed: November 24, 2000
For: RADIOTELEPHONE HANDSET
Group: Not yet assigned
Examiner: Not yet assigned

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
Washington, D.C. 20231

November 24, 2000

Sir:

Prior to examination, please amend the above-identified application as follows.

IN THE CLAIMS

Please cancel claims 8 and 9 without prejudice or disclaimer of the matter therein.

Please amend claims 5 and 6 as follows:

5. (Amended) A radiotelephone handset as in [any preceding] claim 1, wherein the cover comprises a slide.

6. (Amended) A radiotelephone as in [any preceding] claim 1, wherein the cover comprises a flip.

IN THE ABSTRACT

Line 3, delete "(10)"; same line 3, delete "(30)";

line 4, delete "(20)";

line 7, delete "(31b)"; same line 7, delete "(31a)";

line 13, delete "(20)";

line 14, delete "(31b)";

line 16, delete "Figures 4(a), 4(b)".


REMARKS

Entry of the above amendments prior to examination is respectfully requested.

Please charge any shortage in fees due in connection with the filing of this paper, or credit any overpayment of fees, to the deposit account of Antonelli, Terry, Stout & Kraus, LLP, Deposit Account No. 01-2135 (367.39322X00).

Respectfully submitted,

ANTONELLI, TERRY, STOUT & KRAUS, LLP



Carl I. Brundidge
Registration No. 29,621

CIB/jdc
(703) 312-6600

A Radiotelephone HandsetBackground of the Invention

5

The present invention relates generally to a radiotelephone handset.

It is well known to provide a radiotelephone with a user-moveable cover which in its closed position covers all or most of the keys of the keypad. Conventionally, the radiotelephone is carried around by the user in this position. When the radiotelephone is actively used by the user, for example, when placing or receiving a call, the cover can be moved by the user to its open position for the duration of the call. It is also well known to provide a radiotelephone with user-interface lighting for illuminating the display and keypad when the radiotelephone is actively used by the user.

15

The present invention is concerned with power conservation in a radiotelephone handset equipped with both a user-moveable cover and user-interface lighting.

20

Summary of the Invention

25

With this in mind, according to one aspect of the present invention, there may be provided a radiotelephone handset, including

a display;

a keypad;

a cover moveable between a closed position and an open position in which the keypad is accessible to the user; and

30

means for lighting the display and keypad to an extent limited by the position of the cover.

By virtue of the functionality provided by these features, the present invention is able to match the lighting provided by the handset to those parts of the handset which can be seen by the user, and so does not waste power lighting parts of the handset which are obscured from the user by the cover.

For example, in a handset in which when the cover is in a closed position, the display and all the keys are obscured by the cover, when the cover is the closed position, the lighting means is not operable to provide any lighting. In a handset in which when the cover is in a closed position, all the keys, but not the display, are obscured by the cover, when the cover is in the closed position, the lighting means may provide lighting to only the display. In a handset in which when the cover is in a closed position, some, but not all of the keys and not the display, are obscured by the cover, when the cover is in the closed position, the lighting means may light only the display and those keys of the keypad not hidden by the cover.

The present invention is particularly advantageous in relation to this last type of handset, where the keys not hidden by the cover might be used, for quite long periods, to, for example, operate a web browser, other over the air services where limited key access is sufficient, or simply to retrieve some information from the memory of the radiotelephone. During this period, while the cover remains in the closed position, the lighting for the keys hidden by the cover remains deactivated.

In one embodiment, the cover position detection means comprises a single switch which attains a predetermined state when the cover reaches a predetermined position. The predetermined position may be when the cover is fully open, or alternatively fully closed.

In a further embodiment, the cover position detection means comprises a plurality of switches which each attains a state when the cover reaches a predetermined position. In this way, the lighting provided by the handset can be more finely matched to the position of the cover. Alternatively, finer matching can be achieved, in another embodiment, by implementing the cover position detection means as an analogue transducer means operable to produce an analogue signal indicative of the position of the cover.

Preferably, the cover can take the form of a slide or a flip.

10

According to a further aspect of the invention, there may be provided a method of controlling a radiotelephone handset including a user-moveable cover and user-interface lighting, wherein the user-interface lighting is activated only for those portions of the user-interface which are not hidden by the cover.

15

Brief Description of the Drawings

Exemplary embodiments of the invention are hereinafter described with reference to the accompanying drawings, in which:

20

Figure 1 shows a radiotelephone equipped with a cover in the form of a slide;

Figure 2 shows a radiotelephone equipped with a cover in the form of a flip;

25

Figure 3 shows a block diagram illustrating the hardware layout of the radiotelephone of Figures 1 and 2;

Figures 4(a-c) show the relationship between the position of a slide and the backlighting for various embodiments of the invention; and

30

Figure 5 shows the block diagram of Figure 3 with modified backlighting circuitry.

Detailed Description of the Drawings

5

Figure 1 shows a radiotelephone handset comprising a main body 5 having a front face 6 which is provided with a liquid crystal display 10, a loudspeaker 15, and a keypad 30. Each key on the keypad is made from a translucent material which is coated all over except for the area necessary define the indicia/indices for that key. A cover in the form of a slide 20 is slidably mounted to the main body 5 such that it can be moved from its fully-extended, open position as shown in Figure 1 to its closed position as illustrated by the arrow A. In the closed position, the slide 20 covers all the keys of the keypad 30, but not the display 10. The slide 20 has mounted therein a microphone 22.

Figure 2 shows a similar radiotelephone handset to the one in Figure 1 except that instead of the slide 20, a cover in the form of a flip 25 is mounted for rotation to the main body 5 such that it can be moved from its fully open position as shown in Figure 2 to its closed position as illustrated by the arrow B. In the closed position the flip covers all the keys of the keypad 30, but not the display 10.

The hardware layout of the Figure 1 and Figure 2 embodiments will now be described with reference to Figure 3. For the sake of convenience, the description will focus on a description of the slide 20, but unless otherwise stated, what is said in relation to the slide 20 also applies mutatis mutandis to the flip 25.

The radiotelephone includes a control processing unit 100 for controlling and coordinating the general operation of the radiotelephone. The processing unit is coupled to a slide switch 110 which provides an indication of whether the

slide 20 is in its open position or not. The processing unit is also operable to control a display driver 120 for driving the display 10, and a backlighting driver 130 for controlling the backlighting. The backlighting comprises an array of light emitting diodes (LED) which are mounted at various locations on the printed circuit board of the radiotelephone. Individual LEDs 32b are mounted behind each key on the keypad 30 and addressable as a group by a control line 130a of the backlighting driver 130. LEDs 32a are mounted at the periphery of the LCD 10 and addressable as a group by a control line 130b of the backlighting driver 130.

10

Figures 4(a-c) illustrate the operation of various embodiments of the invention.

In a first embodiment of the invention, Figure 4(c) represents the radiotelephone with the slide 20 in its closed position and Figure 4(a) represents the radiotelephone with the slide 20 in its open position, whereby it will be appreciated that when slide 20 is in its closed position, all the keys of the keypad are obscured by the slide 20.

In this embodiment, activation of the backlighting from the Figure 4(c) slide position can be caused in two ways:-

(i) Receipt of an incoming call.

Because the slide switch 110 is providing an indication that the cover is not in its open position, the control processing unit 100 instructs the backlighting driver 130 to activate only the LEDs 32a associated with the LCD 10. This is the situation in Figure 4(c) in which the box 50 represents the area of the radiotelephone where the backlighting is operable. If the call proceeds without movement of the slide 20, then the LEDs 32b are not activated. On the other hand, if the slide 20 is moved to its open position, this is sensed by the slide switch 110, whereby the control processing unit 100 also instructs the backlighting driver 130 to not only activate the LEDs 32a associated with

the LCD 10 but also the LEDs 32b associated with the keypad 30. This is the situation in Figure 4(a) in which the box 50 represents the area of the radiotelephone where the backlighting is operable. Once the slide switch 110 detects that the slide 20 has left its open position, LEDs 32b are again deactivated.

The LEDs 32a are deactivated after a set period during which the radiotelephone has not been actively used.

10 (ii) Keyboard access required.

The user may wish to do this, for example, to gain access to the keyboard in order to retrieve information from the memory of the radiotelephone.

15 Moving the slide 20 to its open position will cause the control processing unit 100 to activate the backlighting to the extent permitted by the position of the slide 20, that is, activate the LEDs 32b and 32a. This is the situation in Figure 4(c) in which the box 50 represents the area of the radiotelephone where the backlighting is operable. In this case, when the slide 20 is returned to its closed position, the control processing unit 100 instructs the backlighting driver 130 to deactivate both sets of LEDs 32b and 32a.

Thus, it will be appreciated that when the slide 20 is in its closed position, the LEDs 32a associated with the display 10 can be activated or deactivated according to the specific user-interface functionality programmed into the control processing unit 100.

In a second embodiment of the invention, Figure 4(b) represents the radiotelephone with the slide 20 in its closed position and Figure 4(a) represents the radiotelephone with the slide 20 in its open position, whereby it will be appreciated that when slide 20 is in its closed position, most of the keys 31b of the keypad are obscured by the slide 20, but the keys 31a closest

to the display 10 remain accessible. In this embodiment, the addressing of the backlighting LEDs is modified as illustrated in Figure 5. The address line 130a addresses, as a group, the LEDs associated with the display 10 and the keys 31a. In consequence, this group of LEDs is in the context of this embodiment referred to as 32a. The address line 130b addresses as a group the LEDs associated with the keys 31b.

In this embodiment, activation of the backlighting from the Figure 4(b) slide position can be caused in three ways:-

10

(i) Receipt of an incoming call.

Because the slide switch 110 is providing an indication that the cover is not in its open position, the control processing unit 100 instructs the backlighting driver 130 to activate only the LEDs 32a associated with the LCD 10 and the visible keys 31a. This is the situation in Figure 4(b) in which the box 50 represents the area of the radiotelephone where the backlighting is operable. If the call proceeds without movement of the slide 20, then the LEDs 32b are not activated. On the other hand, if the slide 20 is moved to its open position, this is sensed by the slide switch 110, whereby the control processing unit 100 also instructs the backlighting driver 130 to not only activate the LEDs 32a associated with the LCD 10 and the visible keys 31a but also the LEDs 32b associated with the previously hidden keys 32b. This is the situation in Figure 4(a) in which the box 50 represents the area of the radiotelephone where the backlighting is operable. Once the slide switch 110 detects that the slide 20 has left its open position, LEDs 32b are again deactivated.

30

The LEDs 32a are deactivated after a set period during which the radiotelephone has not been actively used.

(ii) Partial keyboard access required i.e. only keys 31a.

The user may wish to do this, for example, in order to operate a web browser, other over the air services where limited key access is sufficient, or simply to retrieve some information from the memory of the radiotelephone.

- 5 On depressing one of the keys 31a, because the slide switch 110 is providing an indication that the cover is not in its open position, the control processing unit 100 instructs the backlighting driver 130 to activate only the LEDS 32a associated with the LCD 10 and the visible keys 31a. This is the situation in Figure 4(b) in which the box 50 represents the area of the radiotelephone
10 where the backlighting is operable.

The LEDs 32a are deactivated after a set period during which the radiotelephone has not been actively used.

- 15 (iii) Full keyboard access required.

The user may wish to do this, for example, to enter data alphanumeric data into the memory of the radiotelephone.

- 20 Moving the slide 20 to its open position will cause the control processing unit 100 to activate the backlighting to the extent permitted by the position of the slide 20, that is, activate the LEDs 32b and 32a. This is the situation in Figure 4(a) in which the box 50 represents the area of the radiotelephone where the backlighting is operable. In this case, when the slide 20 is returned to its
25 closed position, the control processing unit 100 instructs the backlighting driver 130 to deactivate both sets of LEDs 32b and 32a.

- Thus, it will be appreciated that when the slide 20 is in its closed position, the LEDs 32a associated with the display 10 can be activated or deactivated
30 according to the specific user-interface functionality programmed into the control processing unit 100.

Using a single switch 110 to provide an indication of the position of the slide 20 results in there being a range of positions where the actual position of the slide 20 is not precisely known by the control processing unit 100. For example, if the slide switch 110 detects when the slide 20 has reached its open position, all other positions including the fully closed position will be interpreted by the control processing unit 100 as the closed position. This means, according to the user-interface functionality of the first and second embodiments, that, just before the slide reaches its fully open position, the backlighting will still not have been activated. On the other hand, if the slide switch detects when the slide 20 has reached its closed position, all other positions including the fully open position will be interpreted by the control processing unit 100 as the open position. This means, according to the user-interface functionality of the first and second embodiments, that, as soon as the slide 20 just leaves its fully closed position, say, to an almost closed position, the backlighting will be activated.

In a further embodiment (not shown), the slide switch 110 is implemented as analogue transducer means operable to produce an analogue signal indicative of the position of the slide and the individual rows of keys on the keypad 30 are directly addressable by the backlighting driver 130. In this way, the lighting provided by the handset can be more finely matched to the position of the slide. Alternatively, finer matching can be achieved, in another embodiment, by using a plurality of spaced slide switches to determine more accurately the position of the slide 110. Clearly, this embodiment is not suitable for analogous implementation using a cover in the form of a slide.

CLAIMS

1. A radiotelephone handset, including
 - 5 a display;
 - a keypad;
 - a cover moveable between a closed position and an open position in which
 - 10 the keypad is accessible to the user; and
 - means for lighting the display and keypad to an extent limited by the position of the cover.
- 15 2. A radiotelephone handset as in Claim 1, wherein, when the cover is in the closed position, the display and all the keys of the keypad are obscured by the cover, when the cover is in the closed position, the lighting means is not operable to provide any lighting.
- 20 3. A radiotelephone handset as in Claim 1, wherein, when the cover is in the closed position, all the keys of the keypad, but not the display, are obscured by the cover, when the cover is in the closed position, the lighting means can provide lighting to only the display.
- 25 4. A radiotelephone handset as in Claim 1, wherein, in when the cover is in a closed position, some, but not all of the keys and not the display, are obscured by the cover, when the cover is in the closed position, the lighting means can light only the display and those keys of the keypad not obscured by the cover.
- 30 5. A radiotelephone handset as in any preceding claim, wherein the cover comprises a slide.

6. A radiotelephone handset as in any preceding claim, wherein the cover comprises a flip.

5 7. A method of controlling a radiotelephone handset including a user-moveable cover and user-interface lighting, wherein the user-interface lighting is activated only for those portions of the user-interface which are not hidden by the cover as determined by a detected estimate of the position of the cover.

10

8. A radiotelephone handset constructed, adapted and arranged to operate substantially as hereindescribed with reference to the accompanying drawings.

15 9. A method of controlling a radiotelephone handset substantially as hereindescribed with reference to the accompanying drawings.

ABSTRACT

A radiotelephone handset, including a display (10); a keypad (30) ; a cover (20) moveable between a closed position and an open position in which the keypad is accessible to the user; and means for lighting the display and keypad to an extent limited by the position of the cover. When the cover is in a closed position, some (31b), but not all of the keys (31a) and not the display, are obscured by the cover, when the cover is in the closed position, the lighting means may light only the display and those keys of the keypad not hidden by the cover. These keys may be used, for quite long periods, to, for example, operate a web browser, other over the air services where limited key access is sufficient, or simply to retrieve some information from the memory of the radiotelephone. During this period, while the cover (20) remains in the closed position, the keys (31b) hidden by the cover remain deactivated. The cover can be a slide or a flip.

Figures 4(a), 4(b)

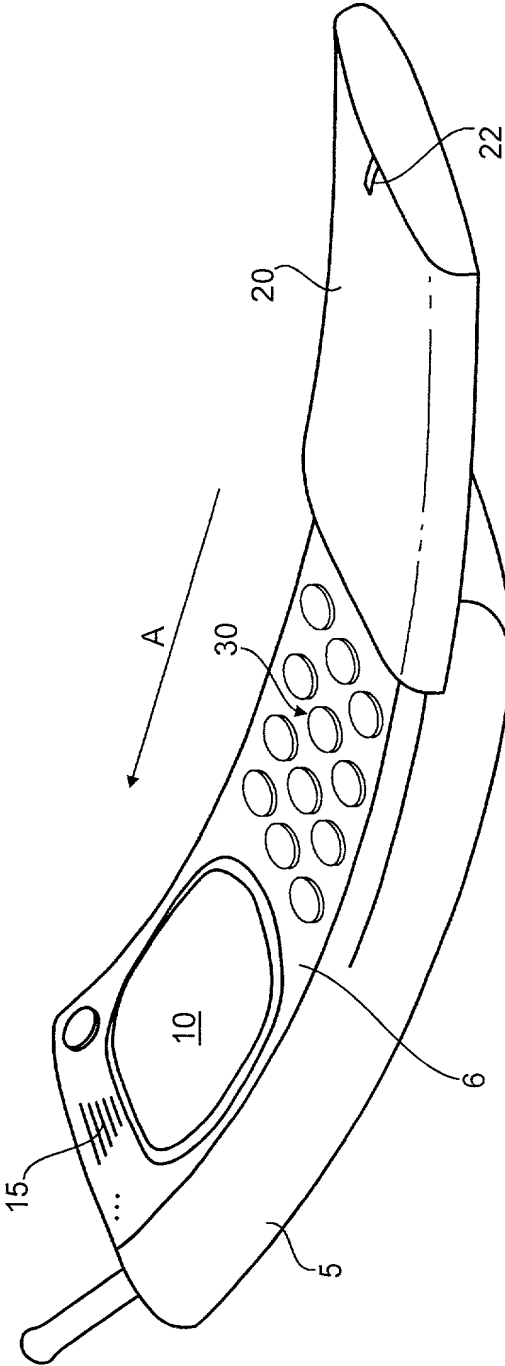


FIG. 1

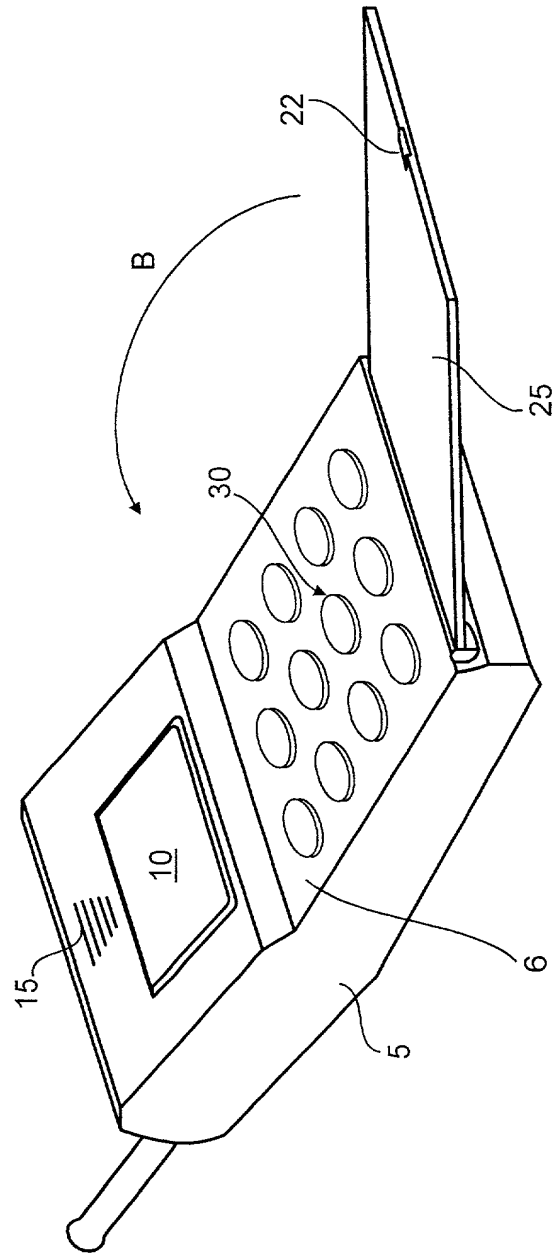


FIG. 2

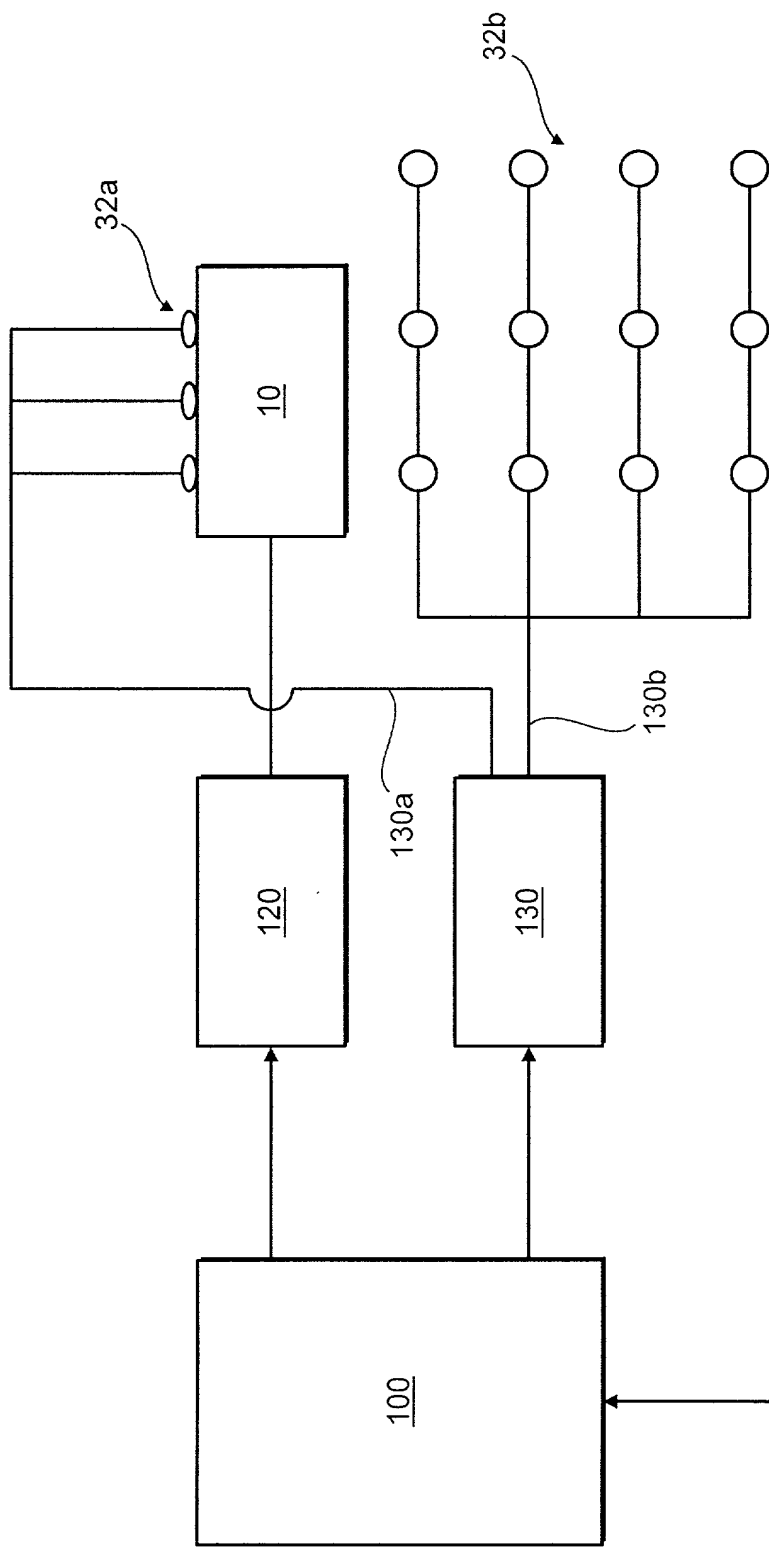


FIG.3

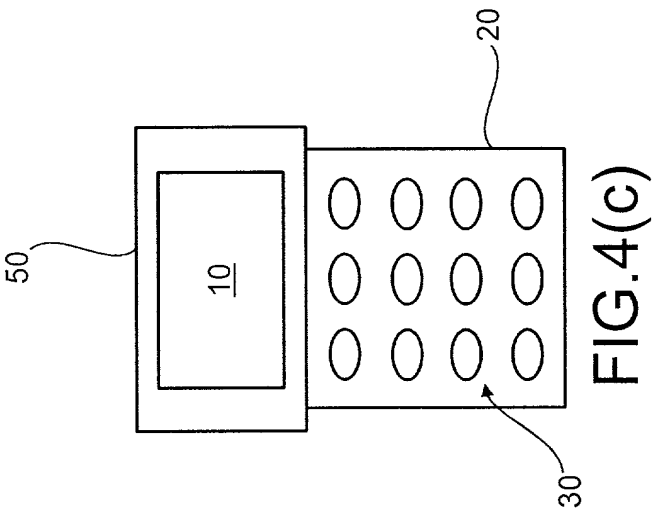


FIG. 4(a)

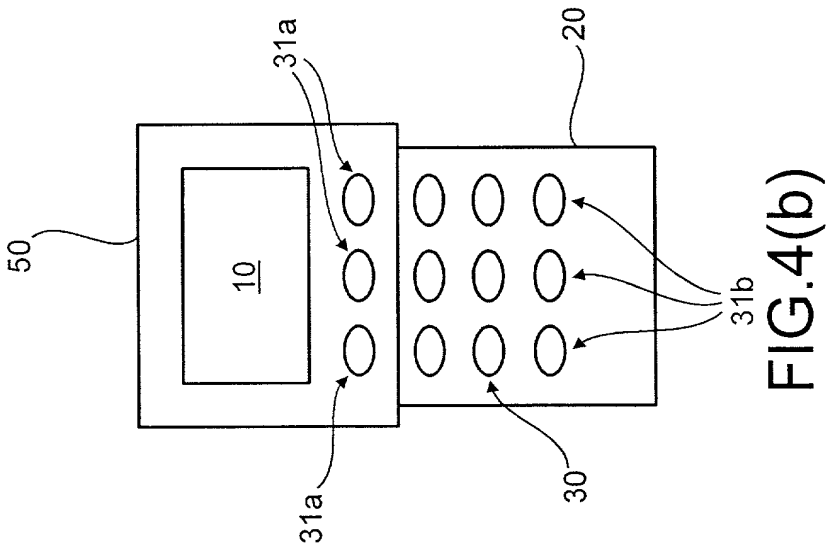


FIG. 4(b)

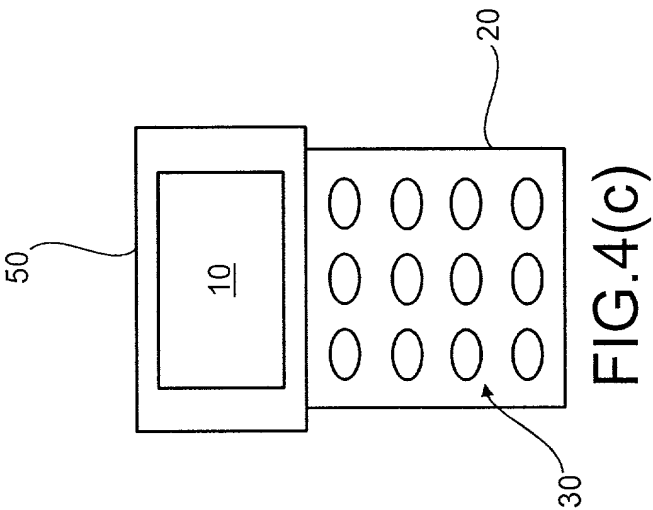


FIG. 4(c)

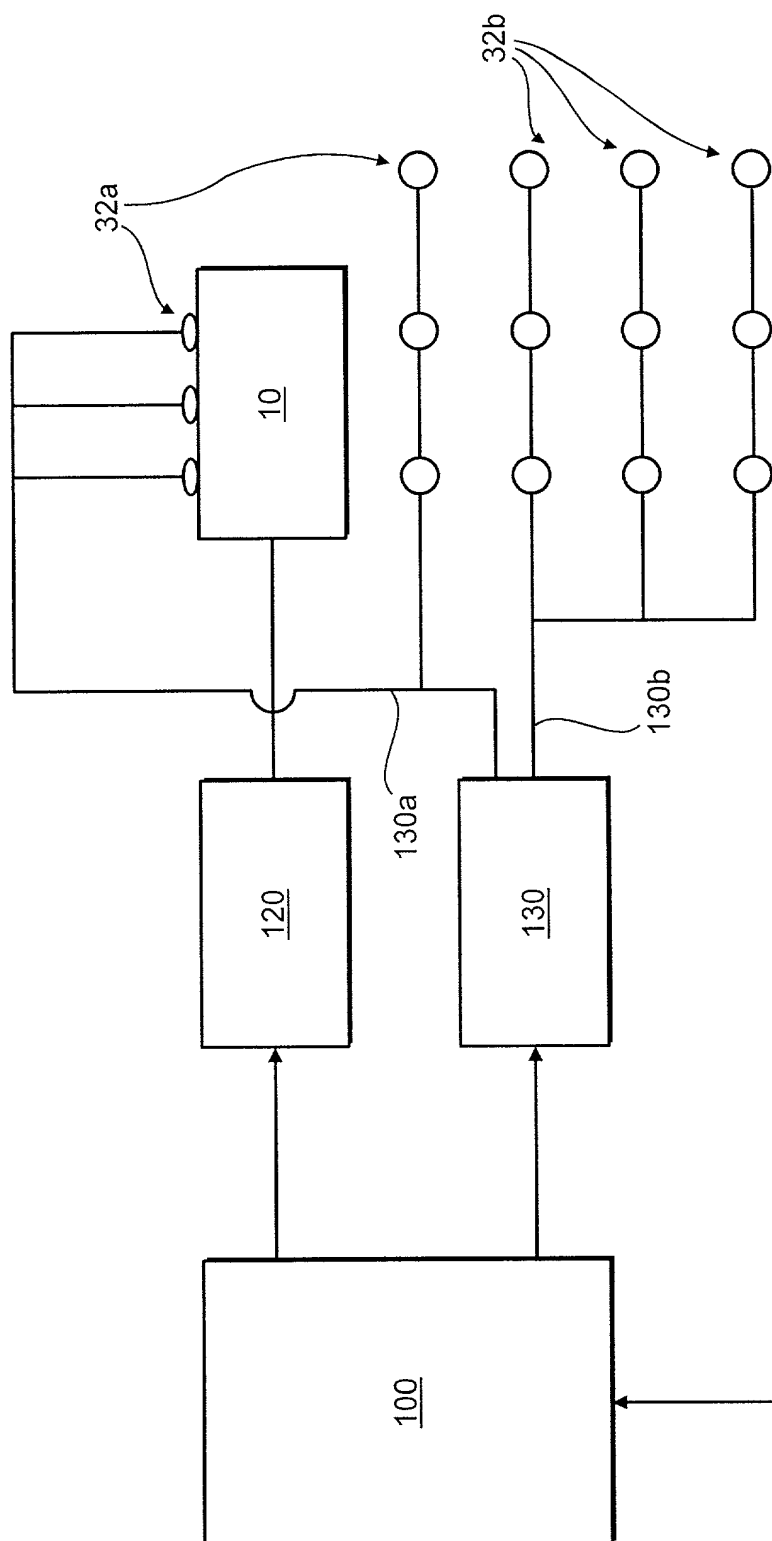


FIG. 5